

# Luk za vođenje cevi

## Vault for the direction of pipe

Šifra artikla	Oznaka	Pakovanje (kom.) osnovno/zbirno
Code of articles	Mark	Packaging (pcs.) basic / collective
01-0028	luk	4/100
	vault	

**Namena:** Primenjuje se u instalacijama podnog grejanja i podnog razvoda za uvođenje ALUPLAST cevi pod radijatore i razvodne ormare.

Omogućava pravilno savijanje cevi 90 bez deformacije unutrašnjeg promera, štiti cev od mehaničkih oštećenja u toku izvođenja glazura i završnih radova, ujedno daje i estetski izgled cevovoda. Omogućava zamenu cevi ispod završene podlogeu slučaju greške montaže ili oštećenja cevi (kod podnog razvoda).



**Osobine:** Pozicije su urađene od visoko kvalitetnog PP copolymera uz dodatak aditiva i boje. Proizvod je sastavljen od tri pripadajuće pozicije; kućišta, umetka i čepa. Maksimalni prečnik u primeni ALUPLAST-a fi 20, osno rastojanje dva luka u paru sa zupčastom spojnicom je 50 mm, što odgovara osnom rastojanju većine H ventila. Uz dodatak prstena omogućava držanje gibljive cevi (bužira) fi 25 kod podnog razvoda.

**Dimenzije:** gabariti bez čepa; 116,6x66x122 mm, a prema priloženom crtežu.

**Boja:** Bela - Siva

**Pakovanje:** Prema priloženoj tabeli.

Osnovno u PE vrećicu a zbirno u kartonsku kutiju.

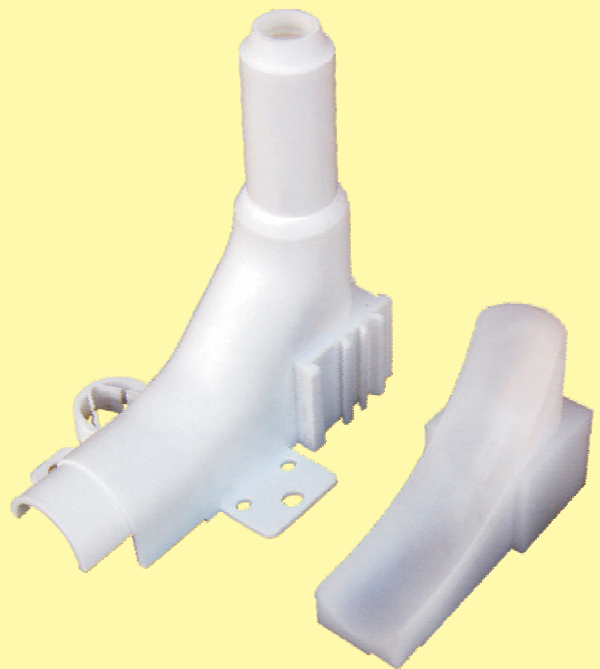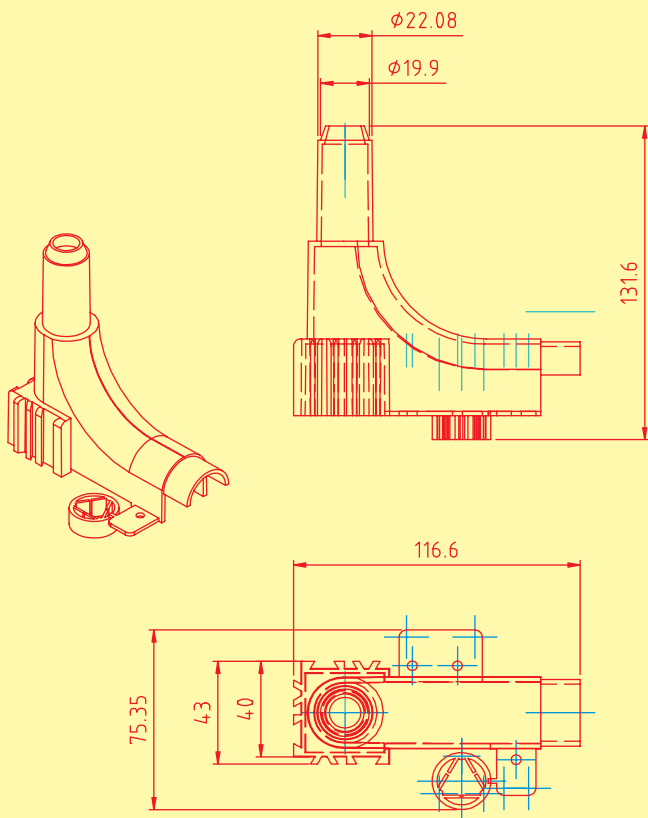

**Purpose:** Applies in installations of underfloor heating and underfloor separations for the installation of ALUPLAST pipes under the radiator and distribution cabinets. Enables correctly bending of the pipe 90 without the deformation of clear width, protects the pipe from mechanical damages during executions of glazes and final works, also provides the esthetic appearance of pipelines.


Enables the replacement of pipe under finished bases in case of error of installation or damages of pipes (at underfloor separations).

**Characteristics:** Positions have been made of high-grade PP copolymer including additives and color. Product is composed of three corresponding positions ; shell, insert and the cap. The maximum diameter in the application of ALUPLAST 20 mm, axial distance of two vaults in pair with the ragged coupling is 50 mm, which answers the axial distance of majority of H valve. Including the ring a enables holding the supple pipe (the tube) 25 mm of underfloor separations.

**Dimensions:** dimension without the cap ; 116,6x66x122 mm, towards the enclosed figure.

**Colour:** White or on the order of buyer for more than 5000 pcs.

**Packaging:** Towards the enclosed table. Basic in PE bag and collective in the cardboard box.

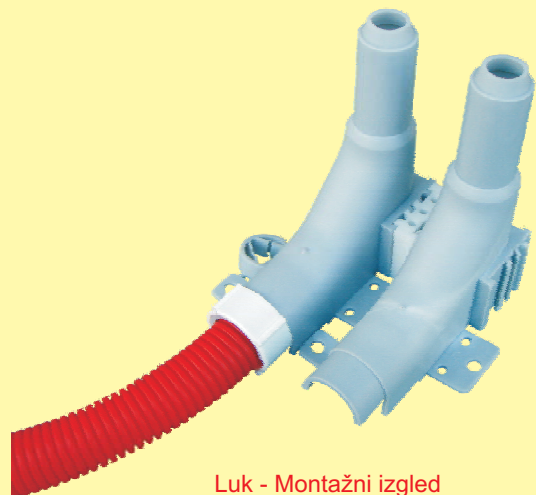

Luk - Montažni izgled  
Vault - the prefabricated appearance in pair