

Armaturni držač ALUPE-X

The reinforced holder ALUPE-X



Namena: Kod podnog grejanja za pričvršćenje ALUPLAST cevi na podužnim i poprečnim žicama armaturne mreže. Time se postiže fiksiranje cevi na željeni razmak i efekat distanciranja armaturne mreže od podloge za 10 - 14 mm.

Osobine: Pozicije su urađene od visoko kvalitetnog PP copolymera uz dodatak aditiva i boje, tehnološkim postupkom inekcijskog brizganja, što proizvodu daje elastičnost i termičku postojanost za primenu u temperaturnom području od -10° do +118° C.

Dimenzije: Prema crtežu.

Boja: Plava, zbog uočljivosti područja montaže.

Pakovanje: Prema priloženoj tabeli.

Osnovno u PE vrećicu a zbirno u kartonsku kutiju.

Purpose: At the underfloor heating for the fastening ALUPLAST pipes on longitudinal and transversal wires of reinforced mesh. Thus, we achieve fixating the pipe to a wished distance and the effect of distancing of reinforced mesh from the base for 10 - 14 mm.



Characteristics: Positions have been made of high-grade PP copolymer including additives and color, with technological process of the injection gushing, that provides the flexibility and the thermal stability of the product for the use in the temperature range from -10° up to +118°C.

Dimensions: Towards the figure.

Colour: Blue, because of the noticeability of areas of installation.

Packaging: Towards the enclosed table.

Basic in PE bag and collective in cardboard box.

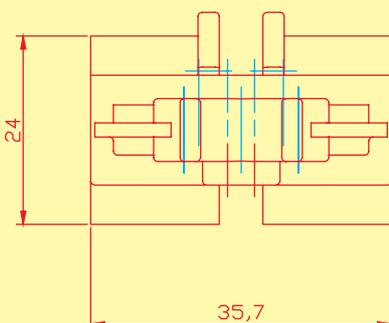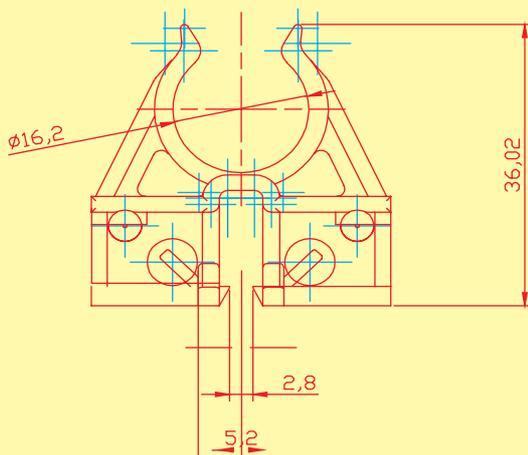

Šifra artikla	Oznaka	Pakovanje (kom.) osnovno/zbirno
Code of articles	Mark	Packaging (pcs.) basic / collective
01-0024	fi 16-18	100/2000
01-0033	fi 20	50/2000

