

## R781




Angle ball valve,  
chrome plated, female-male  
connections, flat base and  
yellow T handle.  
Full port.

### CERTIFICATIONS



PART NUMBER	SIZE
R781X003	1/2"
R781X004	3/4"
R781X005	1"

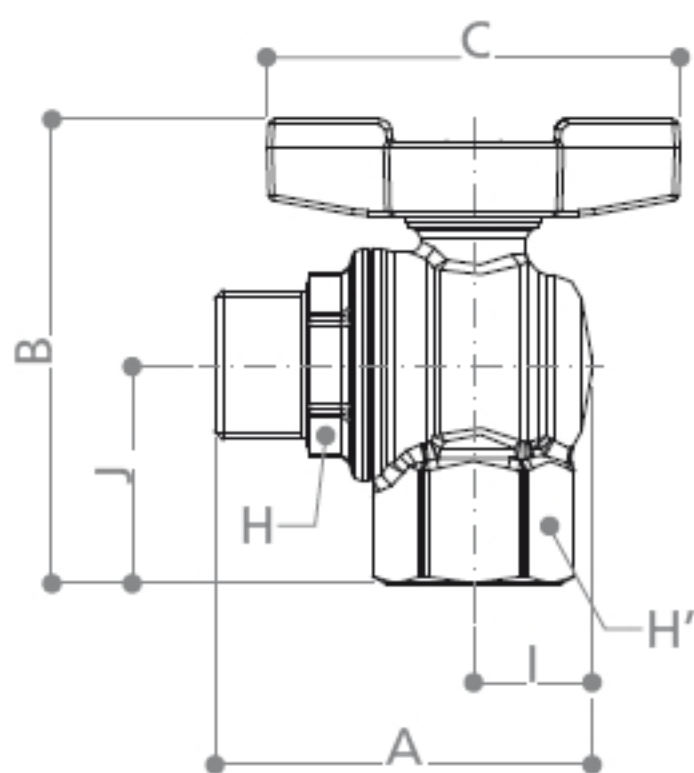

### Materials

Body:	CW617N - EN 12165 hot-pressed brass, chrome plated
Sleeve:	CW617N - EN 12165 hot-pressed brass, chrome plated
Stem:	CW614N – EN 12164 bar turned brass, with inner and outer anti-friction rings and double sealing O-ring
Ball:	CW617N brass, chrome plated
Gaskets:	PTFE with low friction profile
Handle:	painted aluminium T-handle
Nut:	with anti-corrosion coating, guarantee seal and hologram

### Field of application

Max. working conditions with dry saturated steam:	185°C at 1,05 MPa (10,5 bar)
Max. working pressure with water and not dangerous gas:	4,2 MPa (42 bar), for 1/2" and 3/4" 3,5 MPa (35 bar), from 1"
Max. operating pressure (MOP) with gas:	0,5 MPa (5bar)
Max. operating working pressure with fluid hydrocarbons:	1,2 MPa (12bar)

ITEM	SIZE	DN	A	I	B	J	C	H	H'
R781	1/2"	15	58	18	71	33	63	22	26
	3/4"	20	67	21	82	39	73	29	32
	1"	25	79	25	94	46	73	36	41