

R783



Angle ball valve,
chrome plated, female-
female connections and
yellow T handle.
Full port.

CERTIFICATIONS



PART NUMBER

SIZE

R783X003


1/2"

R783X004

3/4"

R783X005

1"

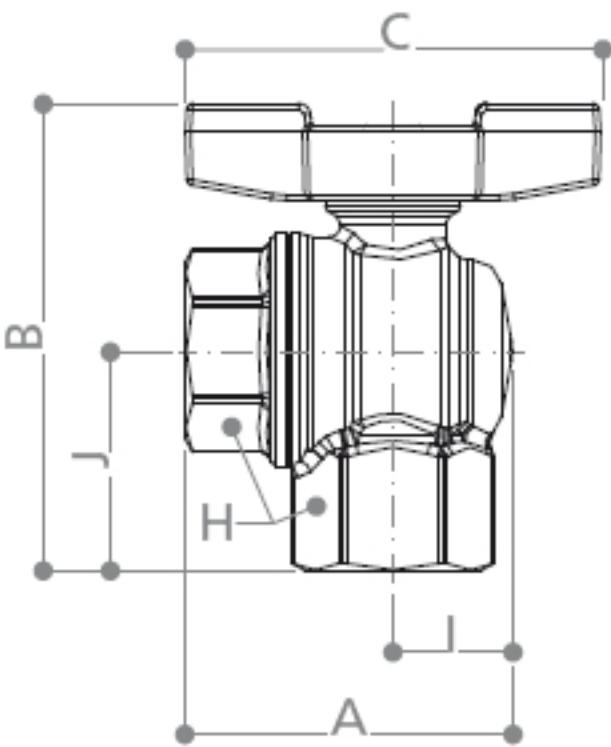

Materials

- Body: CW617N - EN 12165 hot-pressed brass, chrome plated
Sleeve: CW617N - EN 12165 hot-pressed brass, chrome plated
Stem: CW614N – EN 12164 bar turned brass, with inner and outer anti-friction rings and double sealing O-ring
Ball: CW617N brass, chrome plated
Gaskets: PTFE with low friction profile
Handle: painted aluminium T-handle
Nut: with anti-corrosion coating, guarantee seal and hologram

Field of application

- Max. working conditions with dry saturated steam: 185°C at 1,05 MPa (10,5 bar)
Max. working pressure with water and not dangerous gas: 4,2 MPa (42 bar), for 1/2" and 3/4"
3,5 MPa (35 bar), from 1"
Max. operating pressure (MOP) with gas: 0,5 MPa (5bar)
Max. operating working pressure with fluid hydrocarbons: 1,2 MPa (12bar)

| ITEM | SIZE | DN | A | I | B | J | C | H |
|------|------|----|----|----|----|----|----|----|
| R783 | 1/2" | 15 | 50 | 18 | 71 | 33 | 63 | 26 |
| | 3/4" | 20 | 58 | 21 | 82 | 39 | 73 | 32 |
| | 1" | 25 | 69 | 25 | 94 | 46 | 73 | 41 |